


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s (PBT insulator)

Ordering Information
35112 XX B F R XX BNAX

No. of Pins	Contact Type	Contact Plating
NPin	F=Female	G0:Gold Flash
N=10, 16, 20, 32, 44, 48, 64		S0:Gold Flash/Tin
		S1:3U" Gold/Tin
		S2:5U" Gold/Tin
		S3:10U" Gold/Tin

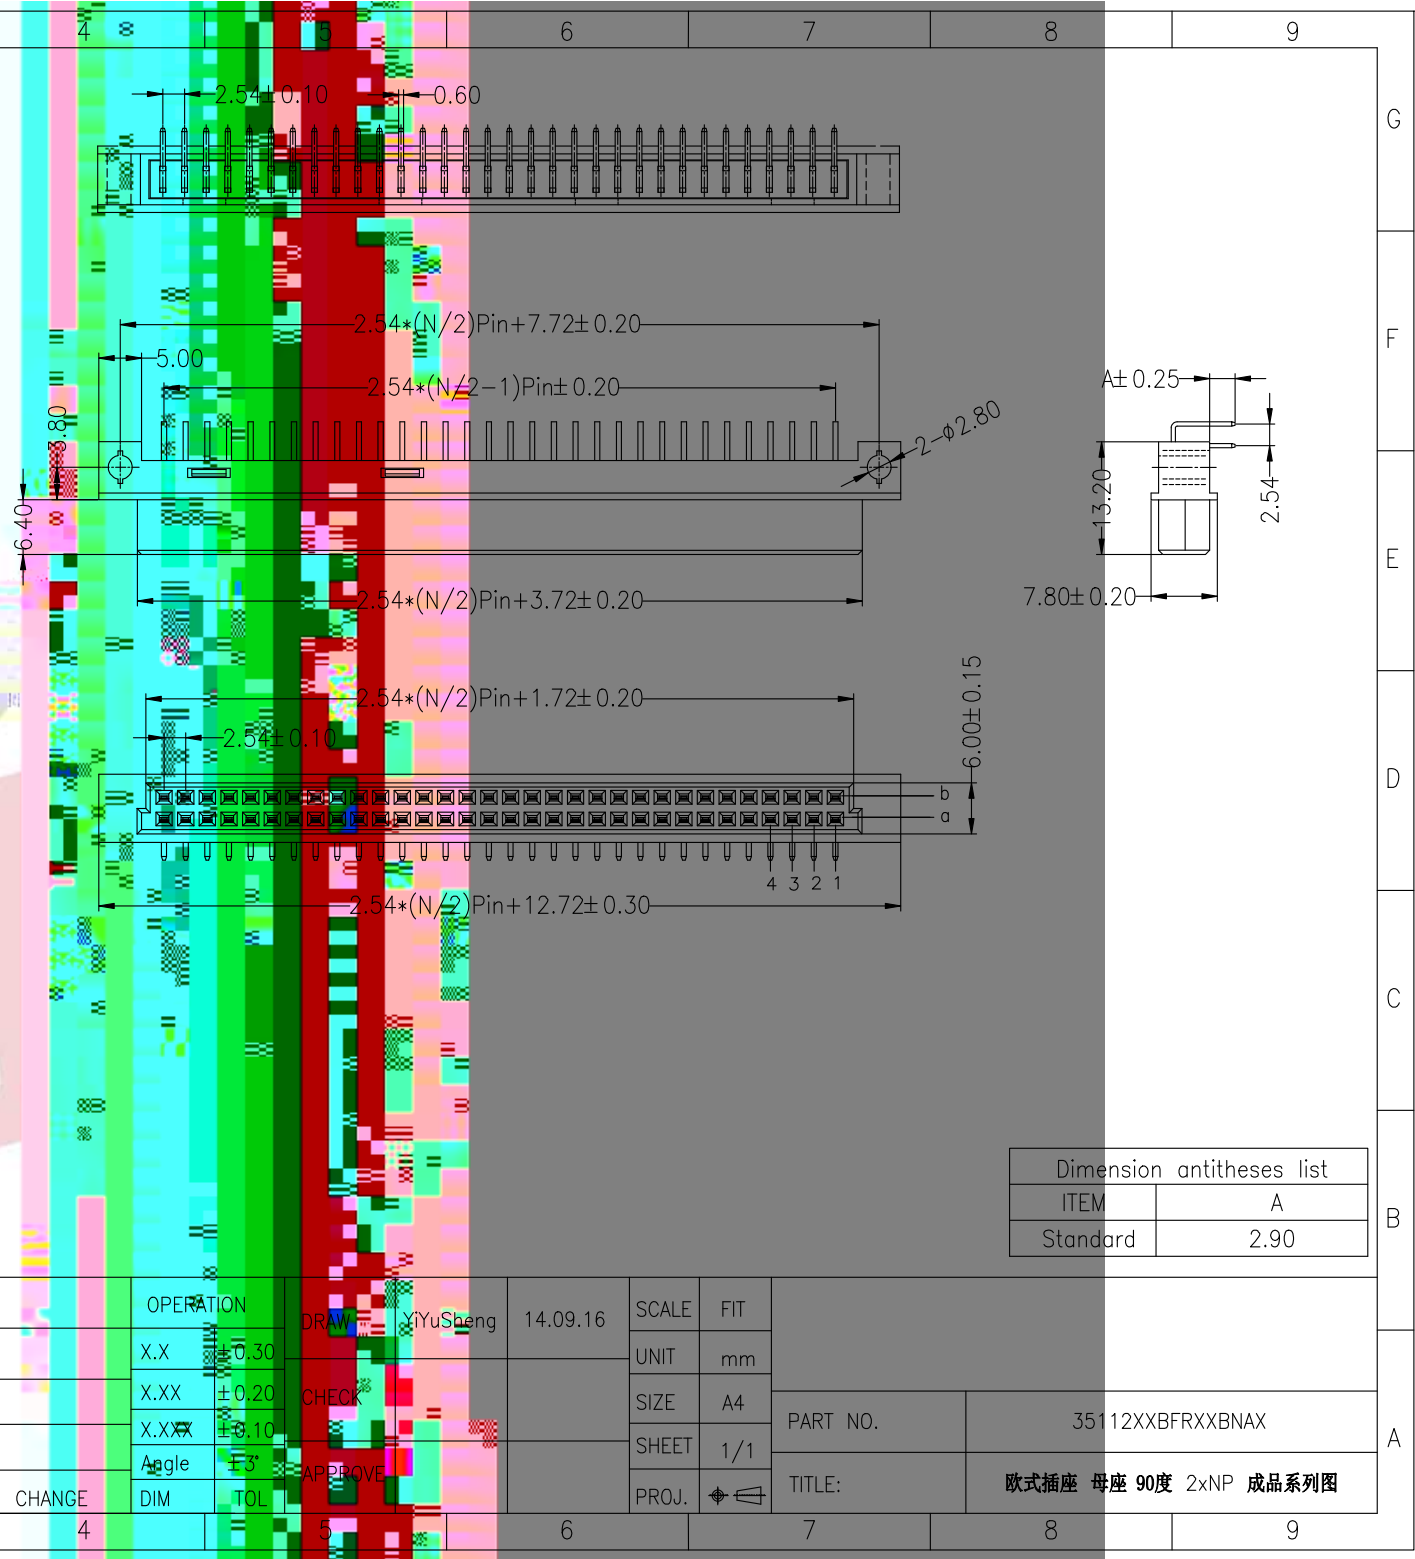

Dimension antitheses list	
ITEM	A
Standard	2.90

				OPERATION															
				X.X	±0.30	DRAW	XiYuSheng	14.09.16	SCALE	FIT									
				X.XX	±0.20				UNIT	mm									
B	2014.09.16	增加UL标识		X.XXX	±0.10	CHECK			SIZE	A4									
A0	2014.04.11	NEW DRAWING		Angle	±3°				SHEET	1/1									
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL	APPROVE			PROJ.	☉									
											PART NO.	35112XXBFRXXBNAX							
											TITLE:	欧式插座 母座 90度 2xNP 成品系列图							