

# HSF RoHS

## SPECIFICATIONS

Rated Current:6.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-55°C to +125°C

Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245° C±5° C, 10s(PBT insulator)


## Ordering Information

**3513 2 32 A M R XX B N A X**

No.of Pins  
32PIN

Contact Type  
M=Male

Contact Plating  
G0:Gold Flash  
S0:Gold Flash/Tin  
S1:3U" Gold/Tin  
S2:5U" Gold/Tin  
S3:10U" Gold/Tin  
S4:15U" Gold/Tin  
S5:30U" Gold/Tin  
SN:Tin

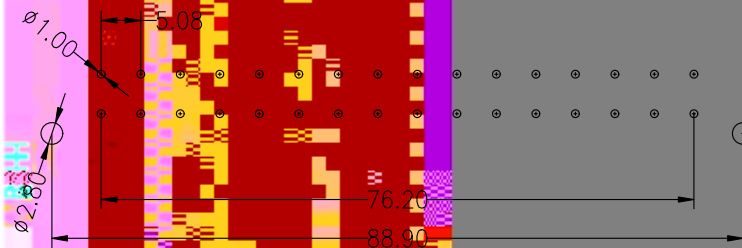

				OPERATION	DRAW	YiYuSheng	17.05.15	SCALE	FIT		
				X.X	±0.30	CHECK		UNIT	mm	PART NO.	
				X.XX	±0.20			SIZE	A4		
				X.XXX	±0.10			SHEET	1/1		
A0	2017.05.15	NEW DRAWING		Angle	±3'	APPROVE		PROJ.		TITLE:	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL						
1	2	3	4	5	6	7					