

HSF RoHS

SPECIFICATIONS

Current rating: 5.6AMP.

Contact resistance: 15m Ω max. at 100mA DC

Insulation resistance: 1000M Ω min. at 500V DC

Dielectric withstanding voltage: 1500V AC For 1minute

Operating temperature: -55°C TO +125°C


Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 245°C \pm 5°C For 5 Second

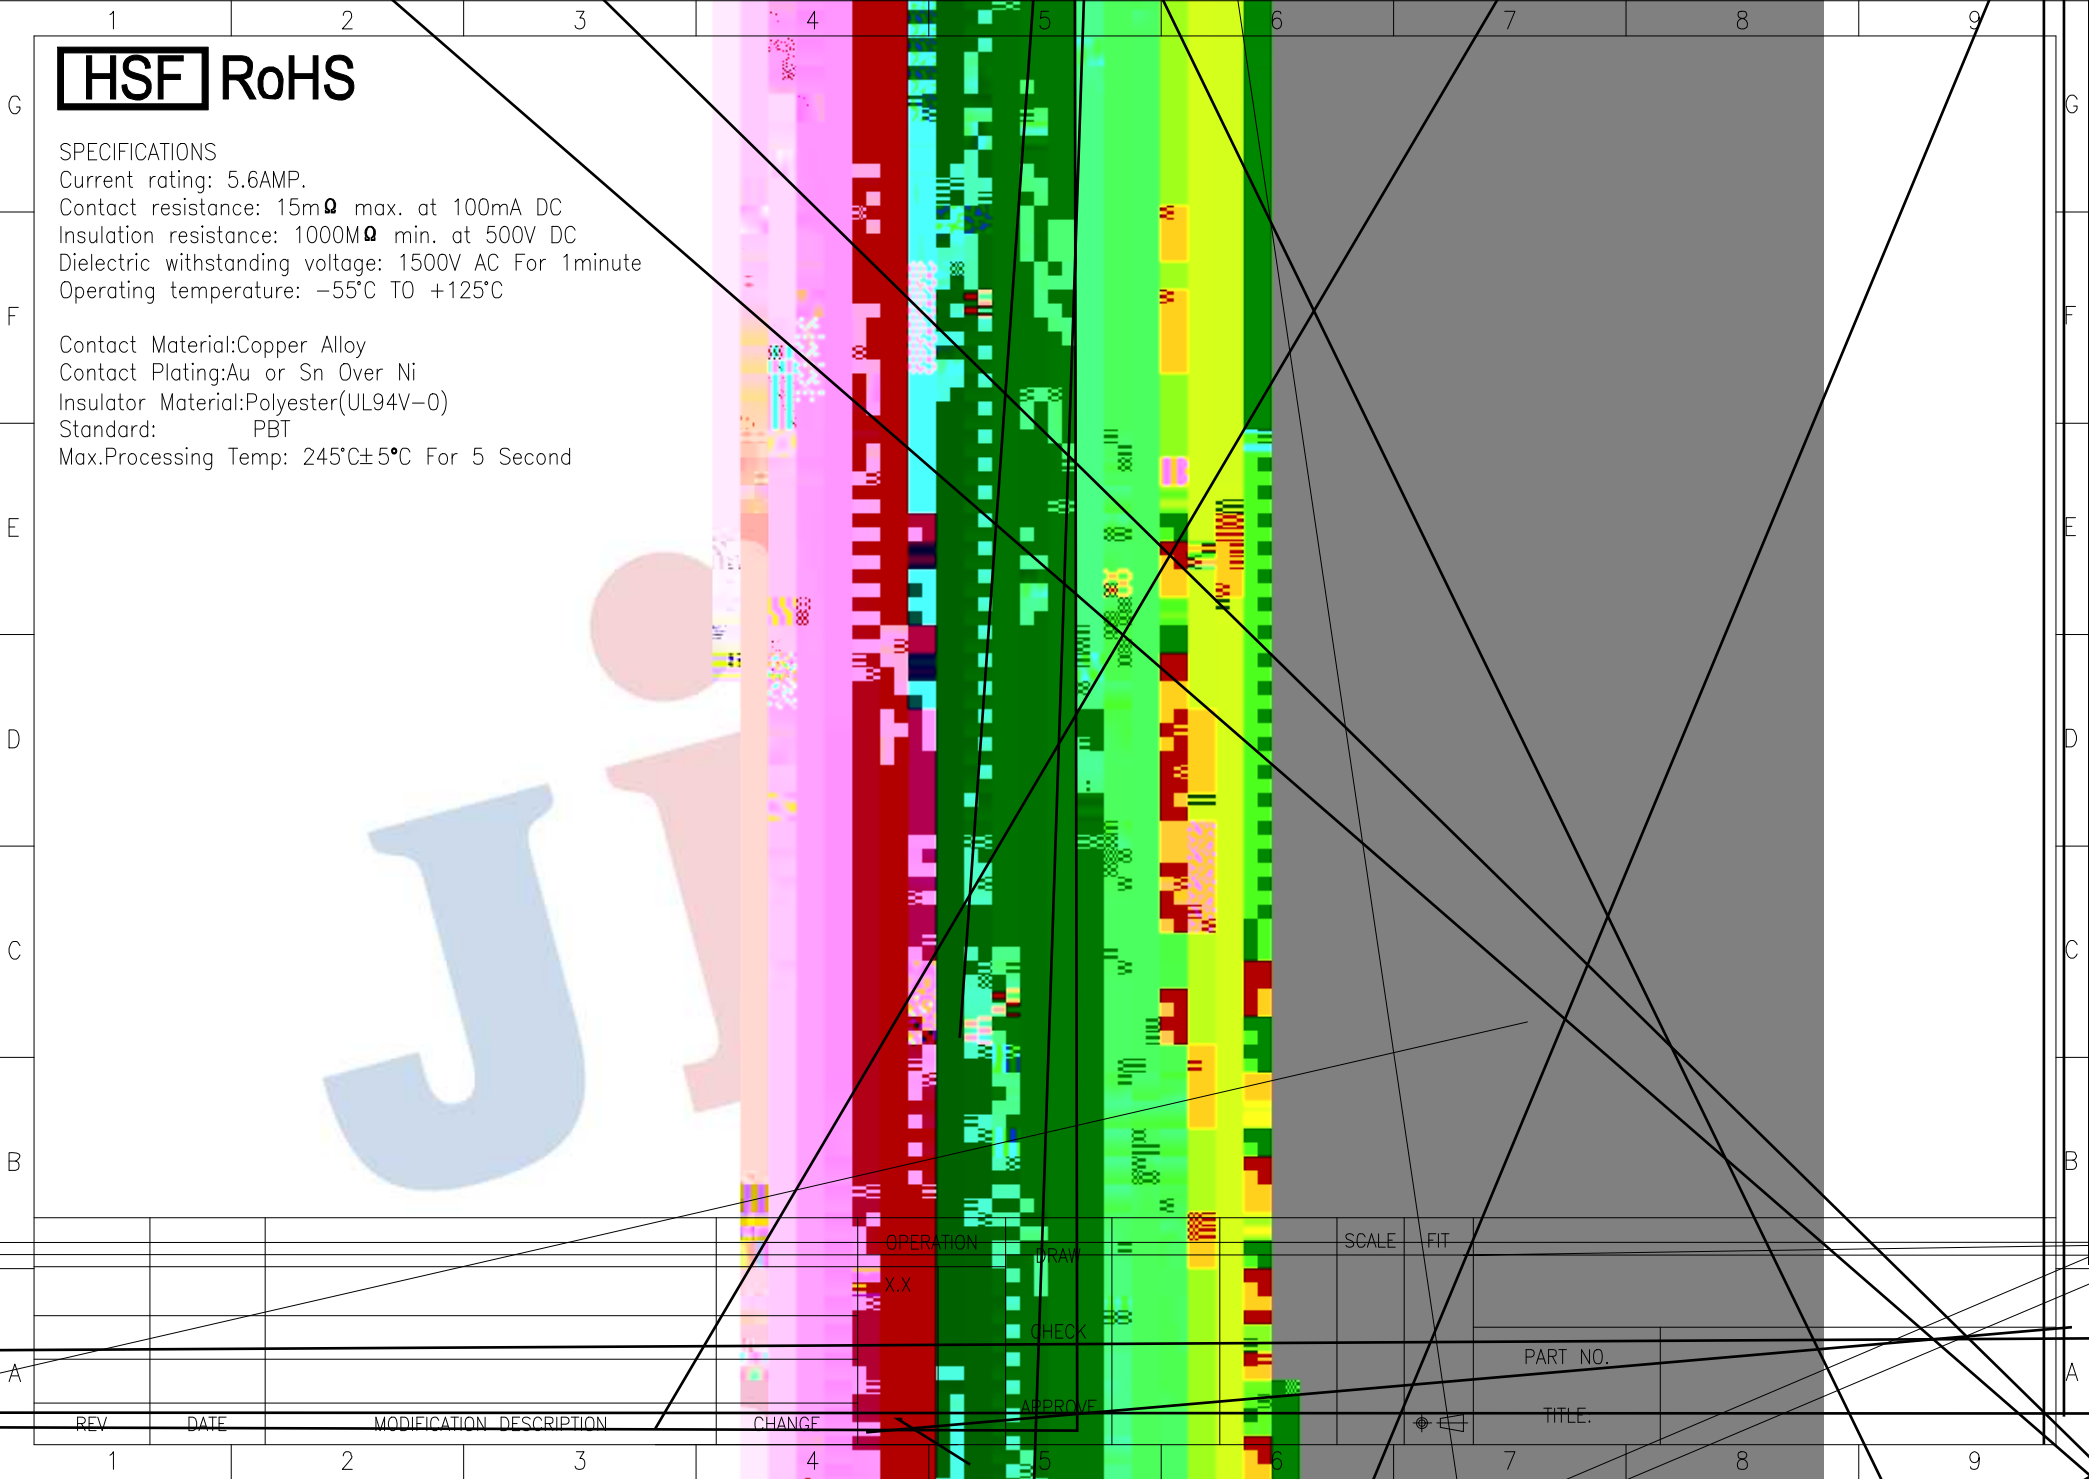

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE
1				X.X					