

HSF RoHS

SPECIFICATIONS


Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Oper

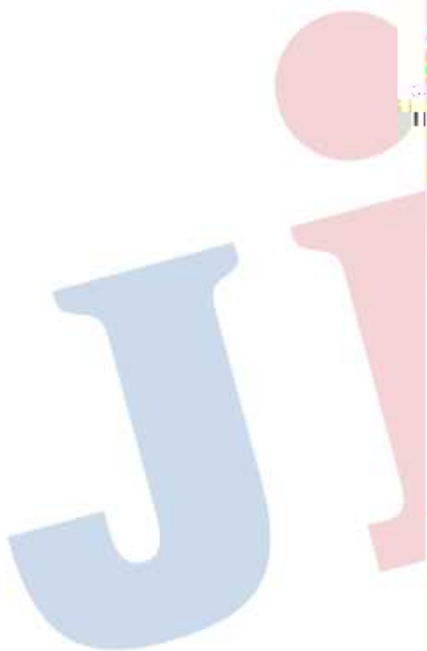

| | | | | | | | | | | | |
|-----|------|--------------------------|--------|-------------|---------|----------|----------|-------|-----|---|--|
| | | | | OPERATION | DRAW | iyusheng | 19.07.09 | SCALE | FIT | | |
| | | | | X.X ±0.30 | CHECK | | | UNIT | mm | | |
| | | | | X.XX ±0.20 | | | | SIZE | A4 | PART NO. 4410-2XXMXXMEBWOX | |
| A | | | | X.XXX ±0.10 | | | | SHEET | 1/1 | TITLE: 2.0加强型金手指连接器 公座 2xNpin H20.2 SMT | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle ±3' | APPROVE | | | PROJ. | 带柱 | | |
| 1 | 2 | 3 | 4 | DIM | TOL | | | | | | |