



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245°C±5°C For 5~10 Second(PBT insulator)

03

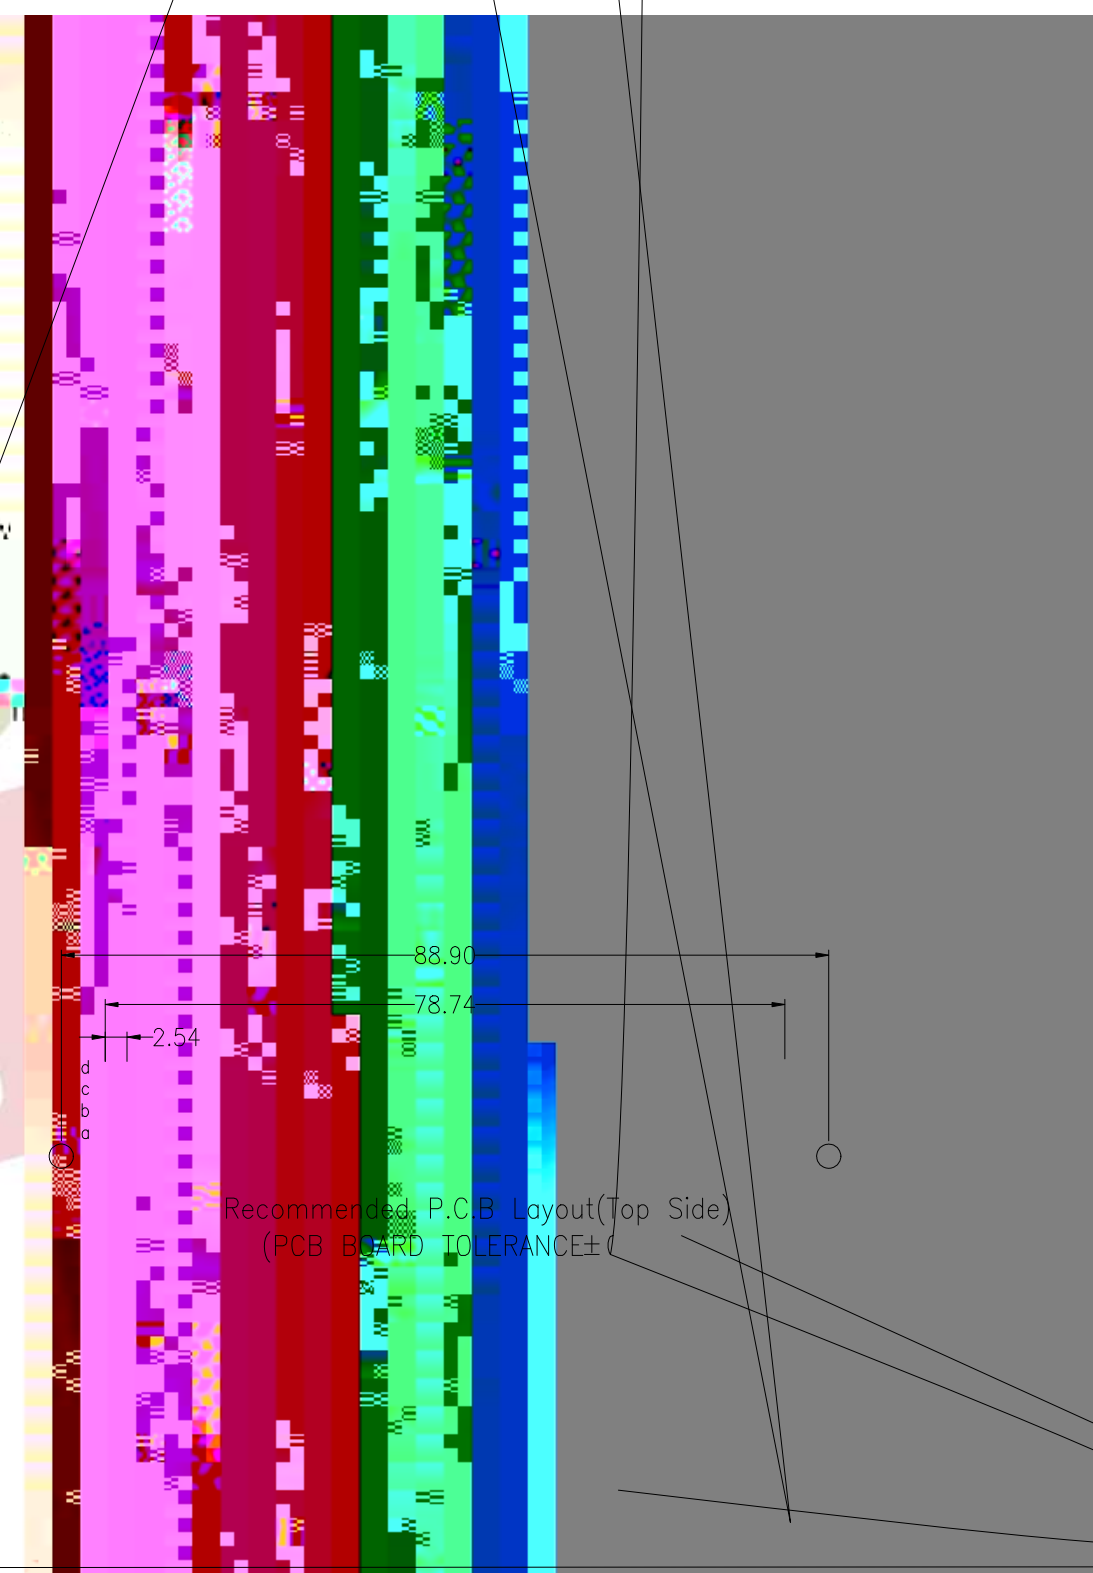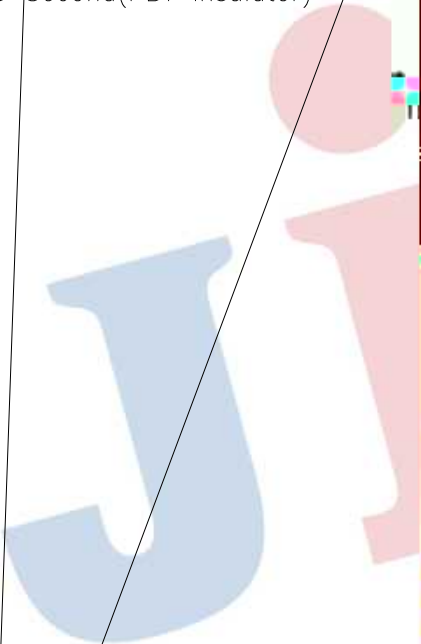

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.1)

03

03