




**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

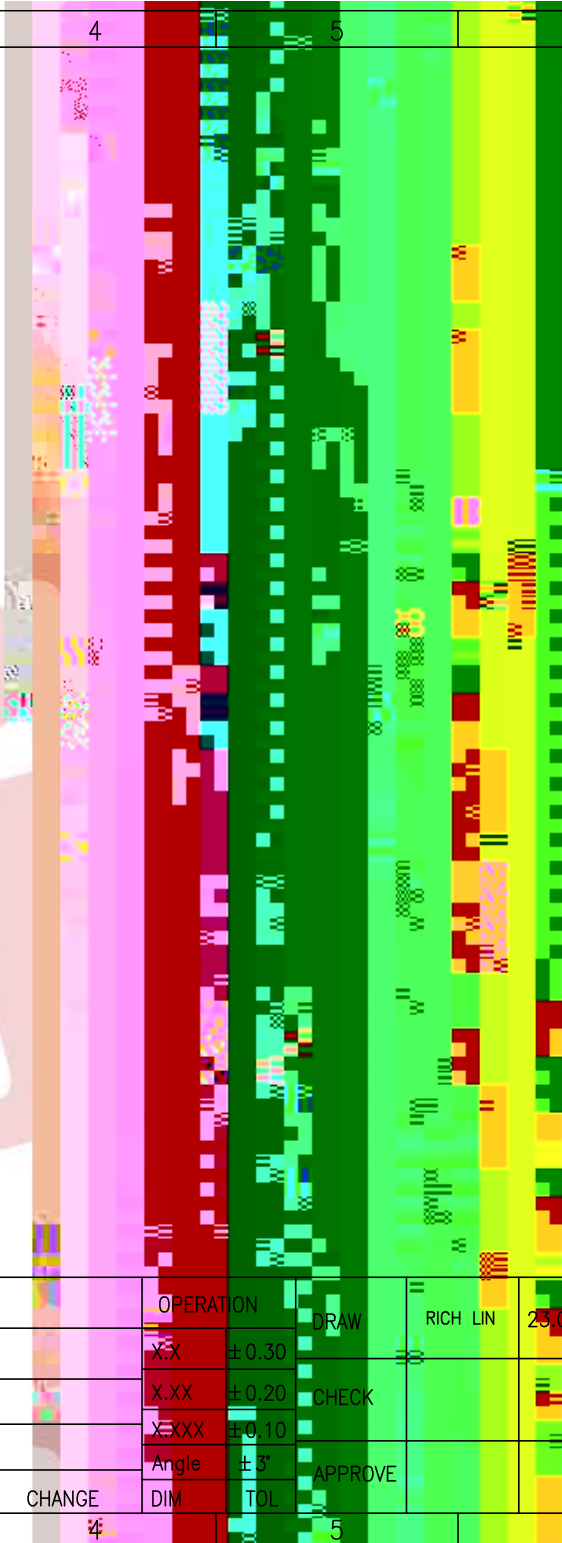

	1	2	3	4	5	6	7	8	9			
G							Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)					
F												
E												
D												
C												
B												
A					OPERATION	DRAW	RICH LIN	23.06.10	SCALE	FIT	深圳市 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5992	
					X.X	±0.30			UNIT	mm		
					X.XX	±0.20	CHECK		SIZE	A4	PART NO.	142511XXXNXXZXXX0X
	A0	2023.06.10	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	TITLE:	1.27mm Pin Header 贴片
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE		PROJ.			
					DIM	TOL						
	1	2	3	4	5	6	7	8	9			